


HWP PATIO HEATERS

What is a Patio Heater?

A shortwave radiant heater that creates warm, inviting outdoor spaces for customers, family, and friends. Perfect for pubs, cafes, restaurants and home use. Now available with our zero-glow “Magic Lamps” for discreet, comfort heating.

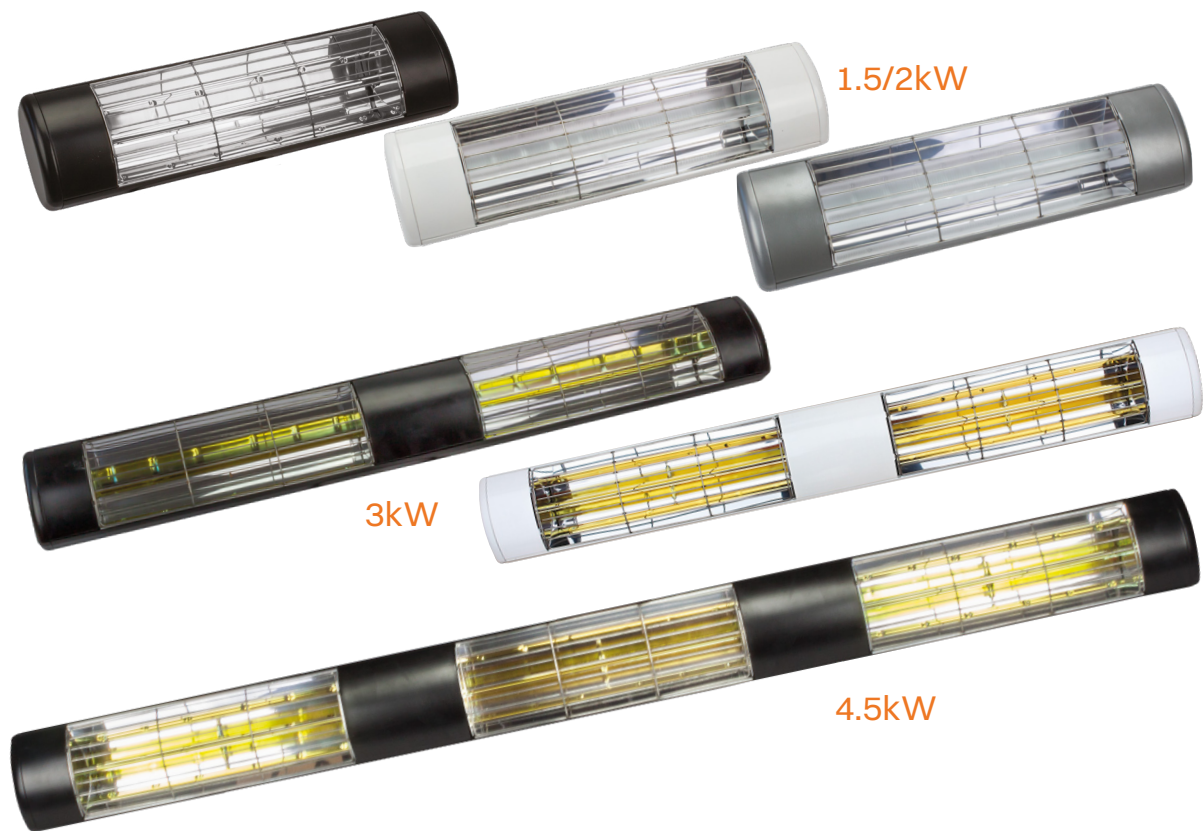

Key Features

- IP55 rated for outdoor use
- Replaceable halogen lamp with 7000 hours average operating life
- Wall bracket with 'up and down' angle adjustment
- Can be suspended
- 3m power lead
- Magic Lamp option for reduced light output and zero-glare



Energy Saving Tip

Control with a TS-7 run down timer to avoid heating an unoccupied area.



Standard Heaters

Model	kW	Finish	Lamp Glow
HWP2-B	1.5	Black	Gold
HWP2-W	1.5	White	Gold
HWP2-S	1.5	Silver	Gold
HWP2-2B	2.0	Black	Red
HWP2-2W	2.0	White	Red
HWP2-3B	3.0	Black	Red
HWP2-3W	3.0	White	Red
HWP2-45B	4.5	Black	Red

Magic Lamp Heaters

Model	kW	Finish	Lamp Glow
HWP2-BM	1.5	Black	Magic Lamp (zero glare)
HWP2-WM	1.5	White	Magic Lamp (zero glare)
HWP2-SM	1.5	Silver	Magic Lamp (zero glare)
HWP2-2BM	2.0	Black	Magic Lamp (zero glare)
HWP2-2WM	2.0	White	Magic Lamp (zero glare)
HWP2-3BM	3.0	Black	Magic Lamp (zero glare)
HWP2-3WM	3.0	White	Magic Lamp (zero glare)
HWP2-45BM	4.5	Black	Magic Lamp (zero glare)

Accessories

	Model	Description	Details
	VR-2	Dimmer (3kW max)	Page 142
	TS-7	Push button timer (Light grey finish)	Page 132
	TS-7B	Push button timer (Black finish)	Page 132

Technical


kW	Volts	Dimensions (mm)			Weight (kg)
		H	W	D	
1.5	230	120	480	140	1.7
2.0	230	120	480	140	1.7
3.0	230	120	960	140	3.2
4.5	230 or 400/3N	120	1440	140	4.9

This heater requires a minimum type C MCB or type C RCBO circuit breaker

Area Covered (wall mounted)

kW	H (m)	X (m)	Y (m)	Z (m)	m ²
1.5 or 2.0	2.0	2.3	2.4	4.0	7.6
1.5 or 2.0	2.5	3.0	3.0	5.2	12.3
3.0	2.0	3.4	2.4	4.5	9.5
3.0	2.5	4.2	3.0	5.8	15.0
4.5	2.0	4.3	2.4	5.0	11.2
4.5	2.5	4.8	3.0	6.4	16.8


For outdoor applications we recommend
300W/m² minimum

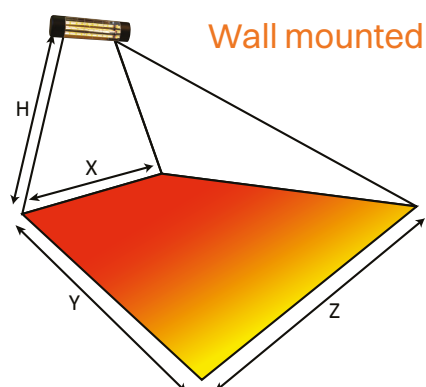

Area Covered (overhead mounted)

kW	H (m)	X (m)	Y (m)	m ²
1.5 or 2.0	2.0	3.6	2.5	9.0
1.5 or 2.0	2.5	4.8	3.5	16.8
3.0	2.0	4.3	2.5	10.7
3.0	2.5	5.2	3.5	18.2
4.5	2.0	4.8	2.5	12.0
4.5	2.5	5.6	3.5	19.6

For outdoor applications we recommend
300W/m² minimum

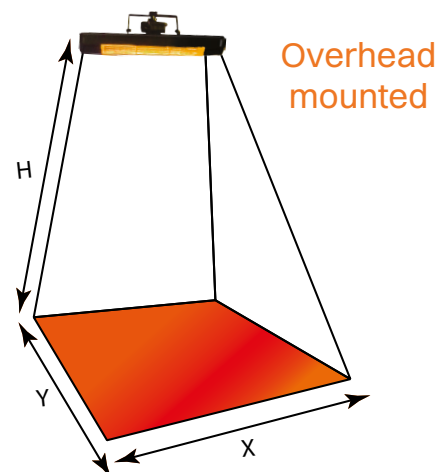

Replacement Lamps

Heater	Lamp Model	kW	Qty Fitted
HWP2 Standard	RL15CW	1.5	1
HWP2 Magic Lamp	RL15MW	1.5	1
HWP2-2 Standard	RL20GW	2.0	1
HWP2-2 Magic Lamp	RL20MW	2.0	1
HWP2-3 Standard	RL15GW/3	1.5	2
HWP2-3 Magic Lamp	RL15MW/3	1.5	2
HWP2-45 Standard	RL15GW/4	1.5	2 (outside lamps)
	RL15GW	1.5	1 (centre lamp)
HWP2-45 Magic Lamp	RL15MW/4	1.5	2 (outside lamps)
	RL15MW	1.5	1 (centre lamp)



London Hippodrome Casino

Location: London

Installed: 12 x 2kW Patio Heaters



Top Golf

Location: Watford, London

Installed: 86 x 2kW Patio Heaters

Simmons

Location: Soho, London

Installed: 6 x 1.5kW patio heaters

