


SystemX SURFACE MOUNT HEATERS

What is a **SystemX** Surface Mount Ceiling Heater?

A robust and efficient heater designed for space heating larger commercial premises with solid ceilings. Multiple SystemX surface-mount ceiling heaters can be daisy-chained and controlled from a single, easy-to-use controller, as shown in the diagram below. All control connections use Cat5 cable, ensuring a fast, reliable, and error-free installation.

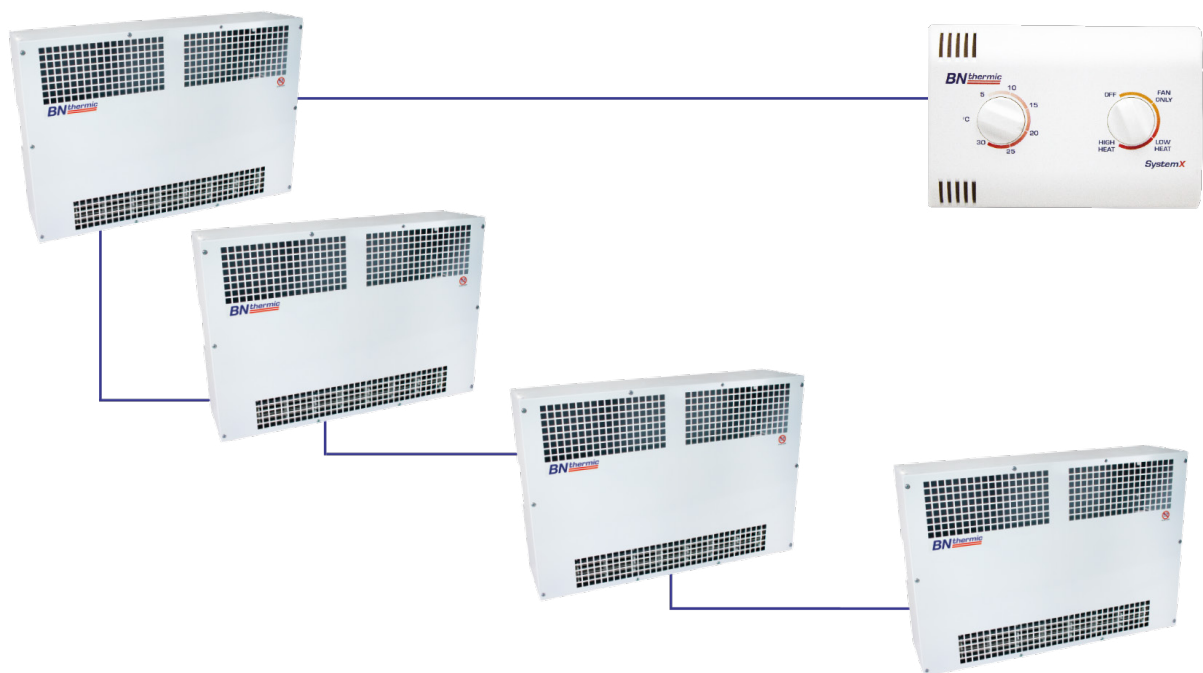

Key Features

- Control up to 12 heaters from a single point
- Compact design – only 152mm high
- Keyhole screw fixing or suspend from drop rods (M6 threaded holes provided)
- All control connections by Cat5 cable for super quick error-free installation
- Controllers do not require their own 230V supply
- BMS compatible using CX-BMS module
- Can be controlled in a group with any other model of SystemX heater



Energy Saving Tip











Control with a 7-day programmable thermostat to keep your running costs to an absolute minimum.



SystemX Surface Mount Ceiling Heaters

Model	kW	Finish
XS-30	3.0	White
XS-30B	3.0	Black
XS-45	4.5	White
XS-60	6.0	White

SystemX Control Components

	Description	Model	Details
	Controller with thermostat On/off/low/high/fan only settings	CX1	Page 131
	Controller with tamper resistant thermostat On/off/low/high/fan only settings	CX2	Page 131
	Controller - manual On/off/low/high/fan only settings	CX3	Page 131
	Controller with digital programmable thermostat	CX6	Page 131
	BMS module for use with volt-free signal	CX-BMS	Page 131
	Optional remote sensor for use with CX1, CX2 or CX6 controllers	CXS	Page 131
	Cat5 cable terminated 5m (white)	DX05	-
	Cat5 cable terminated 10m (white)	DX10	-
	Cat5 cable terminated 10m (black)	DX10B	-
	Cat5 cable terminated 20m (white)	DX20	-
	Cat5 cable joiner	JX1	-

Technical

kW		Volts	Airflow (m³/h)	dB* @2m	Recommended Mounting Height(m)		Dimensions(mm)			Weight (kg)
High	Low				Min	Max	W	D	H	
3.0	2.0	230	245	56	2.4	3.0	575	392	152	8.0
4.5	2.25	230	345	59	3.0	4.5	575	392	152	11.0
6.0	4.0	230	490	58	2.4	3.0	575	592	152	12.5

*Noise levels are factory tested not laboratory tested



Stores Area

Location: Swansea, Wales

Installed: 2 x 3kW Surface Mount Fan Heater in black finish



The Rural Auction Centre

Location: Milnthorpe, Cumbria

Installed: 7 x 6kW Surface Mount Ceiling Heaters